
variables/V-color

## Micromotors | Coreless BLDC motors | SVTN A 01-2446-12-S-O



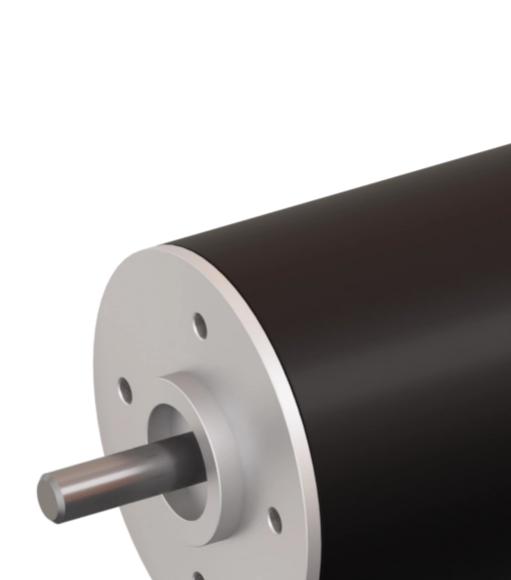

	SVTN A 01-2446-12-S-O
Nominal voltage	12 V
No load speed	14150 rpm
No load current	249 mA
Nominal speed	12678 rpm
Nominal torque	18.000 mNm
Nominal current	2.500 A
Stall torque	173.000 mNm
Stall current	21.900 A
Max. efficiency	79.800 %
Terminal resistance*	0.500 ?
Terminal inductance*	<sup>•</sup> 0.070 mH
Torque constant	8.010 mNm/A
Speed constant	1193 mNm/V

**Notice :** The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

## 2 Pole Brushless DC Motors

### SVTN A 01-2446-12-S-O

Speed/torque gradient81.80 rpm/mNmMechanical time constant3.600 ms

#### SVTN A 01-2446-12-S-O

#### **Rotor inertia**

4.200 gcm<sup>2</sup>

The bene?ts of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy

- Light and compact, easy integration
- High reliability
- Good return on investment



product engineering services

# expertise in connectivity