
variables/V-color

## Micromotors | Coreless BLDC motors | SVTN A 01-2453-24-S-H



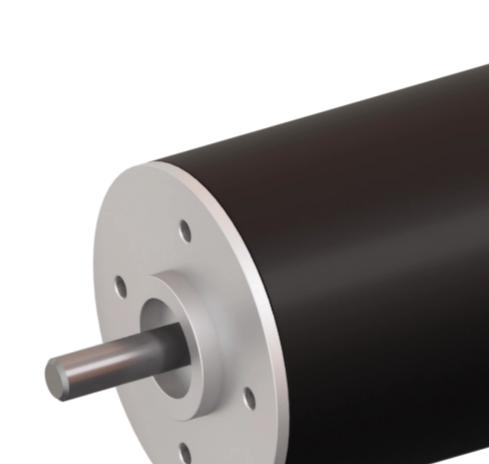

	SVTN A 01-2453-24-S-H
Nominal voltage	24 V
No load speed	15398 rpm
No load current	156 mA
Nominal speed	14347 rpm
Nominal torque	20.000 mNm
Nominal current	1.510 A
Stall torque	293.000 mNm
Stall current	20.000 A
Max. efficiency	83.100 %
Terminal resistance*	1.200 ?
Terminal inductance*	<sup>e</sup> 0.190 mH
<b>Torque constant</b>	14.770 mNm/A
Speed constant	647 mNm/V

**Notice :** The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

## 2 Pole Brushless DC Motors

### SVTN A 01-2453-24-S-H

Speed/torque gradient52.50 rpm/mNmMechanical time constant3.200 ms

#### SVTN A 01-2453-24-S-H

#### **Rotor inertia**

5.900 gcm<sup>2</sup>

The bene?ts of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy

- Light and compact, easy integration
- High reliability
- Good return on investment



product engineering services

# expertise in connectivity