


variables/V-color

Micromotors | Coreless BLDC motors | SVTN A 01-4088-36-S-O



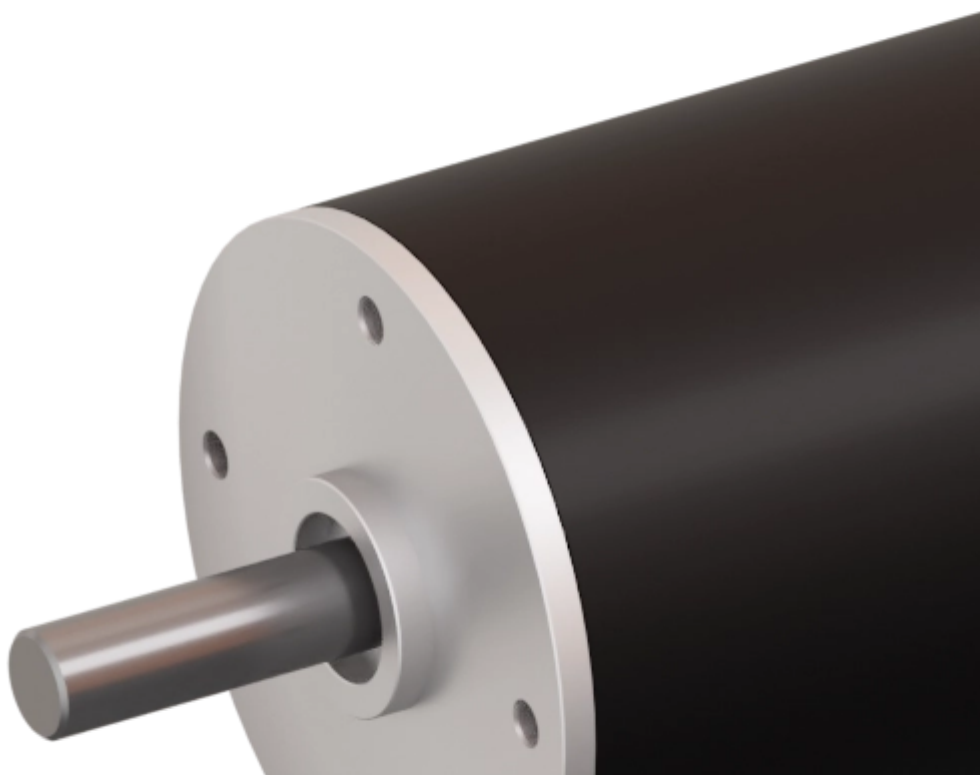

Feature

SVTN A 01-4088-36-S-O

Nominal voltage	36 V
No load speed	8032 rpm
No load current	290 mA
Nominal speed	7379 rpm
Nominal torque	200.000 mNm
Nominal current	4.990 A
Stall torque	2460.000 mNm
Stall current	58.100 A
Max. efficiency	86.400 %
Terminal resistance*	0.600 ?
Terminal inductance*	0.380 mH
Torque constant	42.590 mNm/A
Speed constant	224 mNm/V

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

2 Pole Brushless DC Motors

SVTN A 01-4088-36-S-O

Speed/torque gradient	3.30 rpm/mNm
Mechanical time constant	1.900 ms

SVTN A 01-4088-36-S-O

Rotor inertia

54.140 gcm²

The benefits of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



pes

product
engineering
services

expertise in connectivity