
Rotary Union | 1 passage | SPS(M) 5110



The single passage **SPSM Series** rotary unions are small, lightweight but rugged and corrosionresistant thanks to their aluminum construction with a stainless steel shaft. * The use of liquid media is not recommended for this product. Please select from one of our other product lines or consult PES if your application requires use of liquid media.

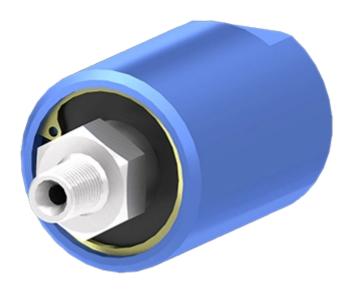

SPS(M) 5110

Type Single Passage

Passages1 passageConnector1/8" BSPTOverall Diameter38.100 mmOverall length60.400 mmMin Torque0.900 NmPassage Size4.000 mm

Maximum Pressure 1 4 MPa (40 bar)

Maximum Vaccum ₁ 30 HG Max Speed ₁ 500 rpm

Temperature Range 1 -18°C à 105°C

Single-pass solution for transfer of air or vacuum through a rotary installation*



General information

SPS(M) 5110

¹ Values are dependent on a combination of all application parameters. Please consult PES.

Connection

Sizes

1/8", 1/4", 3/8", 1/2", 3/4", 1" BSPT

Plating and

Mounting

Shaft: 304 Stainless Steel Housing: Blue Anodized

Coating Aliminium

Tapped holes are provided on the housing with male

BSPT thread connection for shaft mounting

Notice: The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

The SPS(M) Series rotary unions give a single-pass solution for hydraulic, pneumatic or even vacuum applications that can be integrated directly with Thru-bore Slip Rings to combine a single fluid passage with power, signal and/or data transfer.



Advantages



Benefits

- Multipurpose solution for air, gas, oil, water or vacuum
- Easy integration
- High performances (pressure, rotating speed)
- Avoid the need of complex piping arrangements
- Increased machinery performances
- Paiping maintenance mitigated



expertise in connectivity