
variables/V-color

Slip Ring | 54 circuits | SVTS C 09-S-A-30/24



Slip ring for transmission of electrical power and/or electrical signals with through hole for shaft or rotary union.

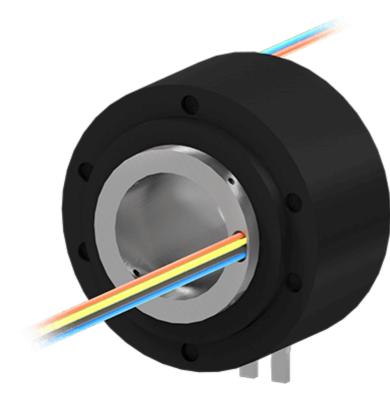

SVTS C 09-S-A-30/24 24 x 5A, 30 x 20A

Circuits

SVTS C 09-S-A-30/24

Outside Diameter180.00 mm mmInside Diameter80.00 mm mmOverall Length (L)257.00 mm mmProtection ratingIP 51Data Transfert<=100Mbit/s</th>MountingThru-bore 80mm



Mechanical features

| Nominal speed | >400 rpm |
|----------------------|---|
| Temperature range | -20° C to $+80^{\circ}$ C (-40° C as option) |
| Contact | gold-gold (alloy) |
| Bearings | Miniature high-precision stainless steel ball bearings |
| Connector | - |
| Mounting | ABS |



Electrical features

| Voltage |
|---------------|
| Cables |
| Cables length |

240 VDC/VAC Silver plated / PTFE insulated / colour coded 250 mm standard (other length on request)

| Dielectric voltage strength | 500VAC @ 60Hz @ 60 sec |
|--------------------------------|--|
| Insulation resistance | >500MOhm/500VDC |
| Dynamic contact resistance | 10mOhm @ 6VDC and 500mA (@ 5rpm) |
| Expected lifetime | 10 ⁷ revolutions (depending on speed, environmetal conditions and size) |

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.





- Ideal for electrical power and signal transmission
- Through hole 80 mm
- High data rate
- Low friction torque
- High lifetime and reliability
- Compliant to CE and ROHS

- Transmission of electric power/signals and fieldbuses in one unit
- Mountable on the shaft mitigating the need of interface parts
- Combinable with fluidic rotary joints and FORJ
- Cost-effective

Customisations

- Cables
- Materials
- Mechanical design
- Flange

product engineering services

expertise in connectivity