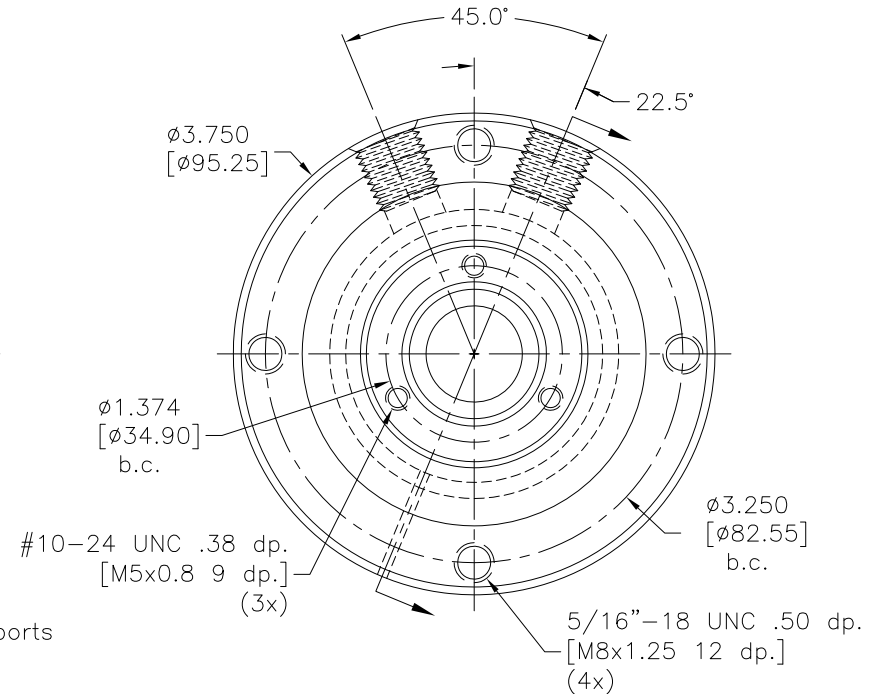




1. Union will be rotated for seal break-in and static air tested.
2. Media must be filtered, clean and free of abrasive content or reduced union life will result.
3. Stainless steel union construction available by using GPS in place of GP in the series designation prefix.
4. Metric connections and threads available by using GPM in place of GP in the series designation prefix.
5. Stainless steel union construction and metric connections/threads available by using GPSM in place of GP in the series designation prefix.
6. See sheets 2 and 3 for product options.

Drawn	JSM	1/20/02
Checked	PJE	2/10/06
Checked	PJE	4/18/08

TOLERANCE EXCEPT AS NOTED	
X.X	±.125
X.XX	±.015
X.XXX	±.005
ANGLES	± 0.5°

SHAFT MTL/PLTING:	
CARBON STL 60-62 Rc BLK OXIDE	17-4 SST 40-47 Rc TDC
HOUSING MTL/PLTING:	
CARBON STL BLK OXIDE	303 SST

DSTI
DYNAMIC SEALING TECHNOLOGIES, INC
13829 JAY ST NW ~ ANDOVER, MN 55304
866-700-DSTI (3784)

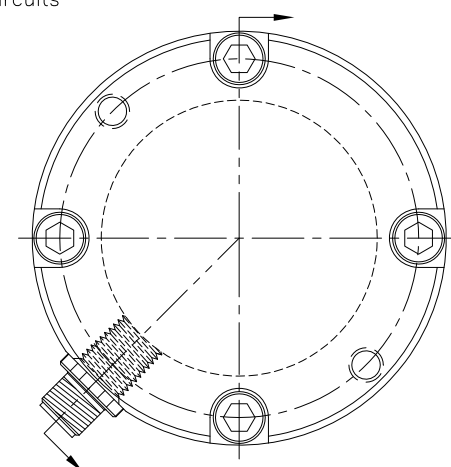
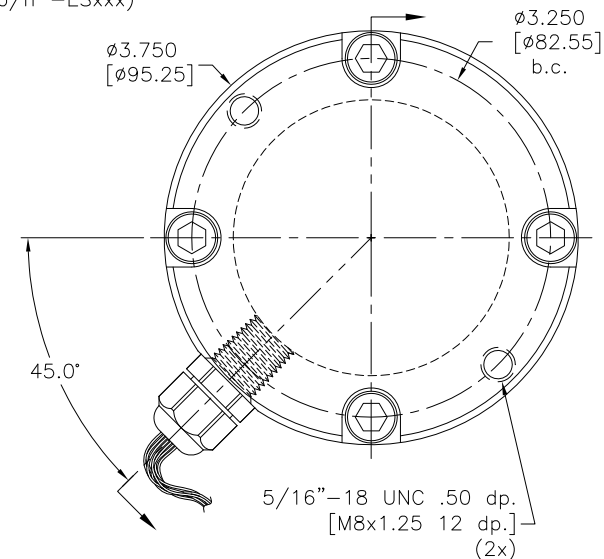
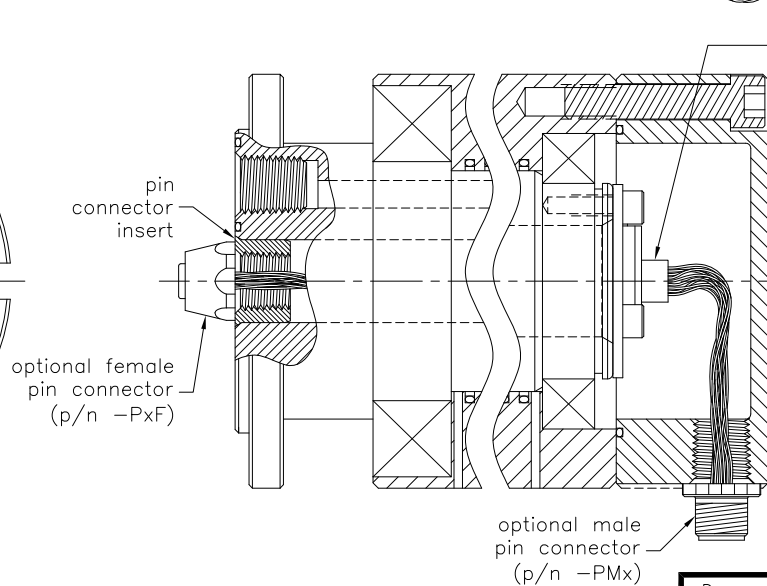
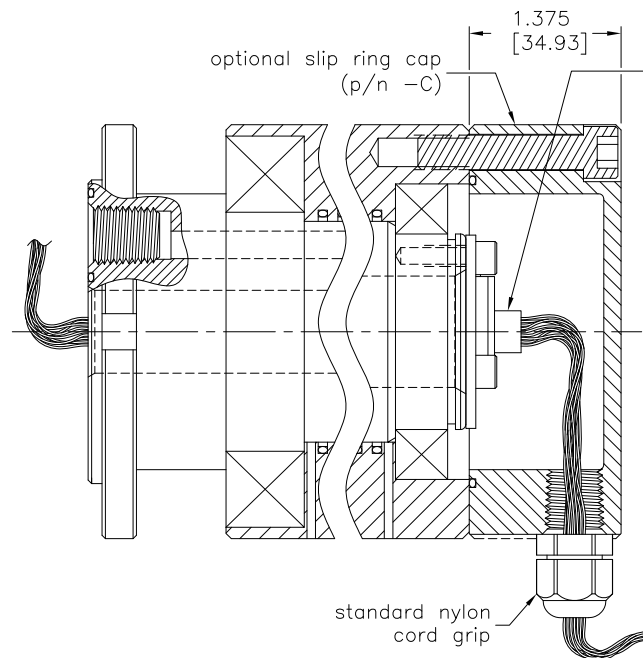
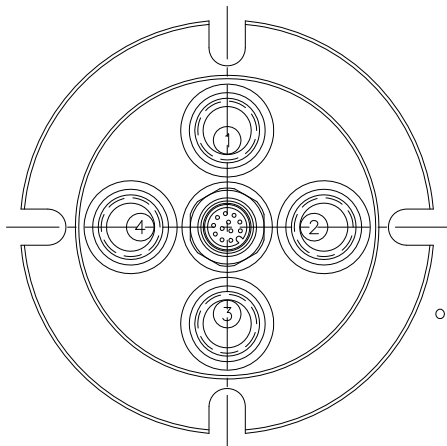
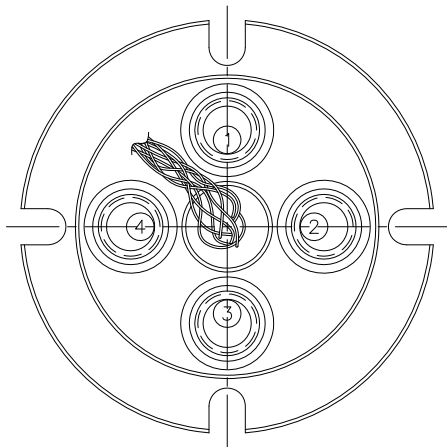
STOCK

GP(S)(M)-241

REV:
A.1

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (DSTI) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT'S CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM DSTI.

**Notes:**

- Optional male AND female pin connector (p/n -PMF).
- Contact DSTI for details about slip rings and pin connectors.

Drawn	PJE	2/7/06
Checked	PJE	4/18/06
Checked	PJE	3/26/12

TOLERANCE EXCEPT AS NOTED	
X.X	±.125
X.XX	±.015
X.XXX	±.005
ANGLES	± 0.5°




CUSTOMER APPROVAL/DATE:



CAP MTL/PLTING:

ALUM
BLUE ANODIZEPIN CONNECTOR
INSERT MTL/PLTING:
ALUM
BLUE ANODIZECUSTOMER:
STOCK OPTIONSP/N:
GP(S)(M)-241REV:
A.1


THIRD ANGLE PROJECTION:



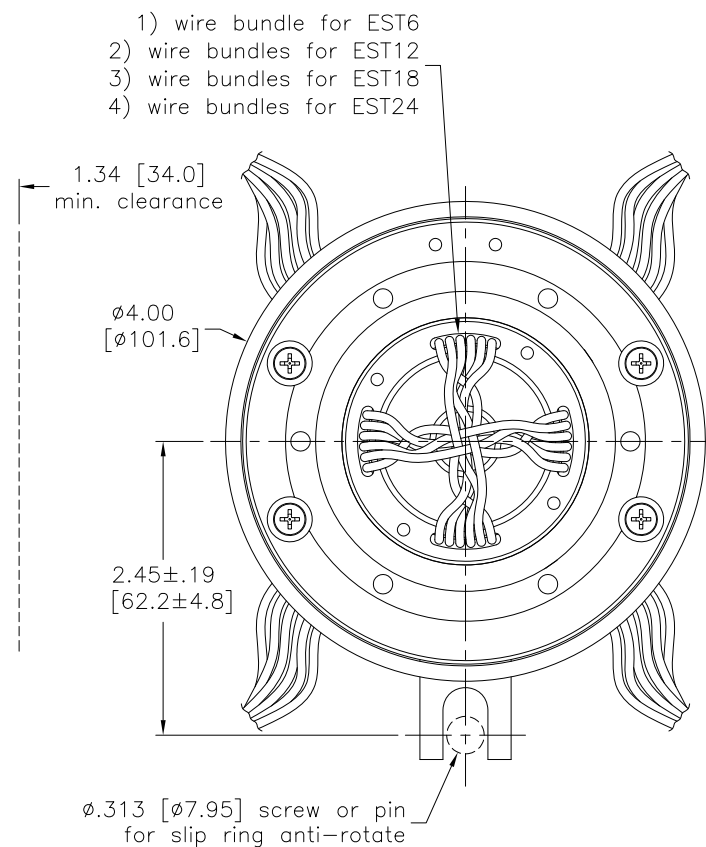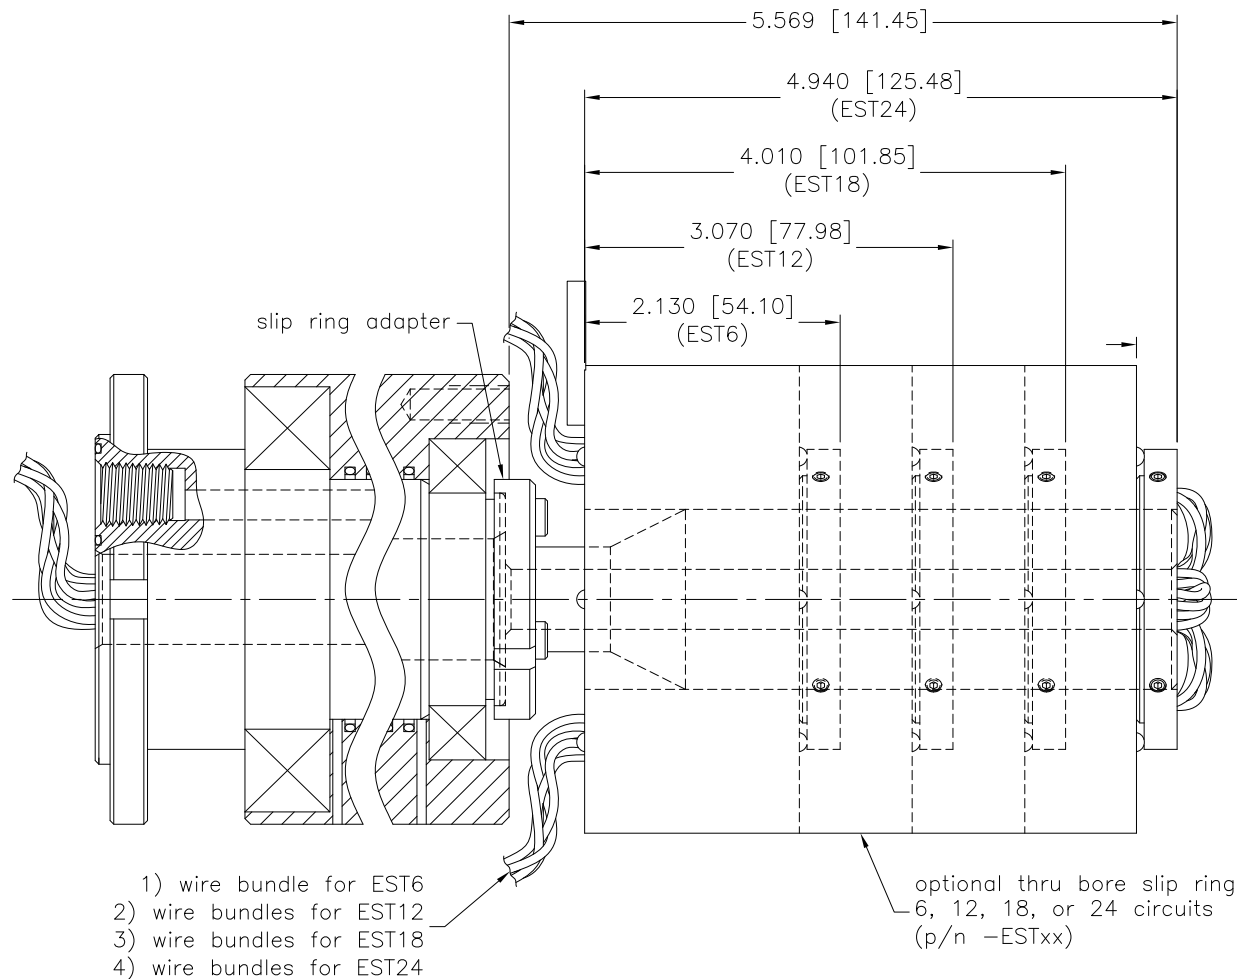THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (DSTI) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT'S CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM DSTI.



THIRD ANGLE PROJECTION:



Drawn	PJE	3/28/12
Checked	DJB	3/29/12
Checked	TCB	3/30/12

TOLERANCE
EXCEPT AS NOTED

X.X	±.125
X.XX	±.015
X.XXX	±.005
ANGLES	± 0.5°

ADAPTER MTL/PLTING:

ALUM
BLUE ANODIZE

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (DSTI) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT'S CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM DSTI.

CUSTOMER:
STOCK OPTIONSP/N:
GP(S)(M)-241REV:
A.1