
Gripper | Angular 2 jaws | CH01-NF-M5



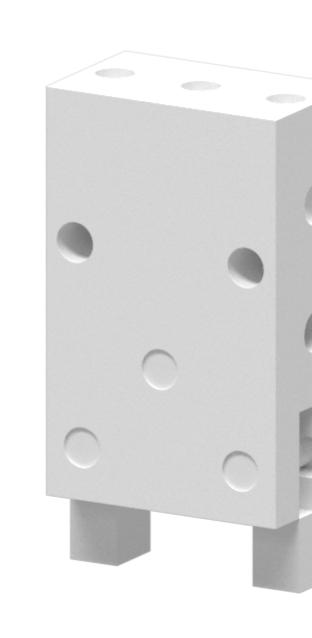

CH01-NF-M5

Course 19-2°

Air consumption 760 mm³

Function Normal closed

Max cycle per minute60 cyclesGripping force*35.000 NWeight0.200 kg

Type Angular 2 jaws



Operating conditions

Working media Filtered air

Operating pressure

3 to 7 bar

Working

temperature

5 to 60°C

Lubrication Normally not required (but if necessary, use

ISOVG32 compliant lubricant)

Repeatability* Initial value : \pm 0.1 mm, after 2 million cycles : \pm

0.2 mm

Lifetime 2 million cycles (with balanced load on each

finger)

Angular Type Cylindrical Gripper, angle 15~-2°

*The values of gripping force in the above table indicates pressure at the top edge of the fingers when gripping with pressure of 5 bar.

Notice: The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

Three types of fingers movement are available within the same dimensions.



Advantages



Benefits

- Compact-Lightweight-Fast
- Silent mechanism
- Quick and simple integration
- Large opening angle
- Position sensors

- No maintenance
- Very short cycle time
- Excellent power/volume ratio
- Low air consumption



expertise in connectivity