


variables/V-color

**Micromotors | Coreless BLDC motors |
SVTN A 01-2446-24-S-H**



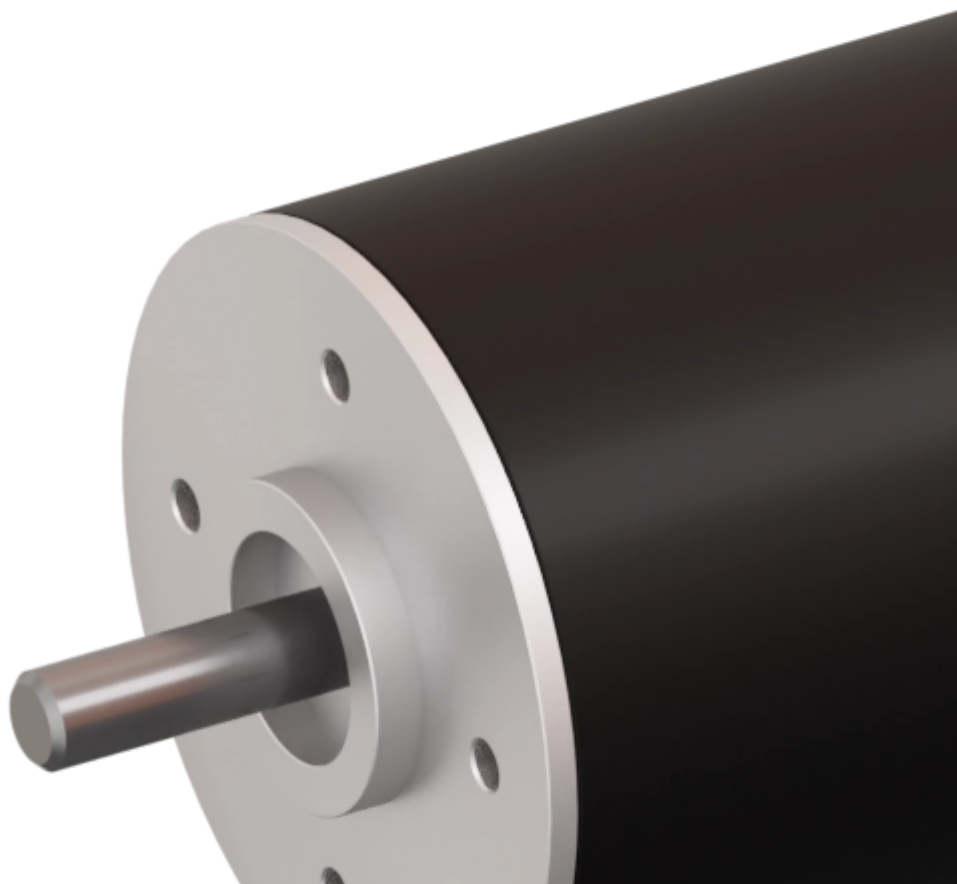

Feature

SVTN A 01-2446-24-S-H

Nominal voltage	24 V
No load speed	13872 rpm
No load current	124 mA
Nominal speed	12487 rpm
Nominal torque	18.000 mNm
Nominal current	1.230 A
Stall torque	180.000 mNm
Stall current	11.200 A
Max. efficiency	80.000 %
Terminal resistance*	2.200 ?
Terminal inductance*	0.290 mH
Torque constant	16.340 mNm/A
Speed constant	584 mNm/V

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

2 Pole Brushless DC Motors

SVTN A 01-2446-24-S-H

Speed/torque gradient	76.90 rpm/mNm
Mechanical time constant	3.400 ms

SVTN A 01-2446-24-S-H

Rotor inertia

4.200 gcm²

The benefits of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



pes

product
engineering
services

expertise in connectivity