


variables/V-color

# **Micromotors | Coreless BLDC motors | SVTN A 01-4088-36-S-H**





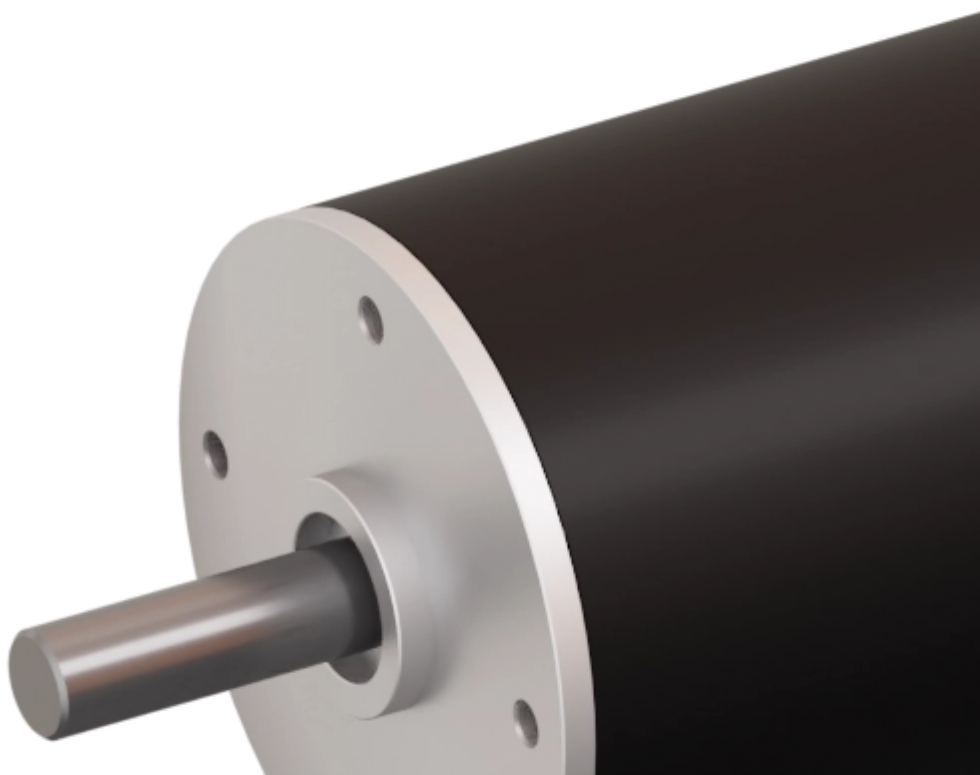

## Feature

### SVTN A 01-4088-36-S-H

|                             |              |
|-----------------------------|--------------|
| <b>Nominal voltage</b>      | 36 V         |
| <b>No load speed</b>        | 8032 rpm     |
| <b>No load current</b>      | 290 mA       |
| <b>Nominal speed</b>        | 7379 rpm     |
| <b>Nominal torque</b>       | 200.000 mNm  |
| <b>Nominal current</b>      | 4.990 A      |
| <b>Stall torque</b>         | 2460.000 mNm |
| <b>Stall current</b>        | 58.100 A     |
| <b>Max. efficiency</b>      | 86.400 %     |
| <b>Terminal resistance*</b> | 0.600 ?      |
| <b>Terminal inductance*</b> | 0.380 mH     |
| <b>Torque constant</b>      | 42.590 mNm/A |
| <b>Speed constant</b>       | 224 mNm/V    |

**Notice :** The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

## 2 Pole Brushless DC Motors

### SVTN A 01-4088-36-S-H

|                                 |              |
|---------------------------------|--------------|
| <b>Speed/torque gradient</b>    | 3.30 rpm/mNm |
| <b>Mechanical time constant</b> | 1.900 ms     |

## SVTN A 01-4088-36-S-H

### Rotor inertia

54.140 gcm<sup>2</sup>

The benefits of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



#### Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



#### Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



**pes**

product  
engineering  
services

**expertise in connectivity**