


variables/V-color

Micromotors | Slotless BLDC motor | SVTN A 02-1636-36-S-H



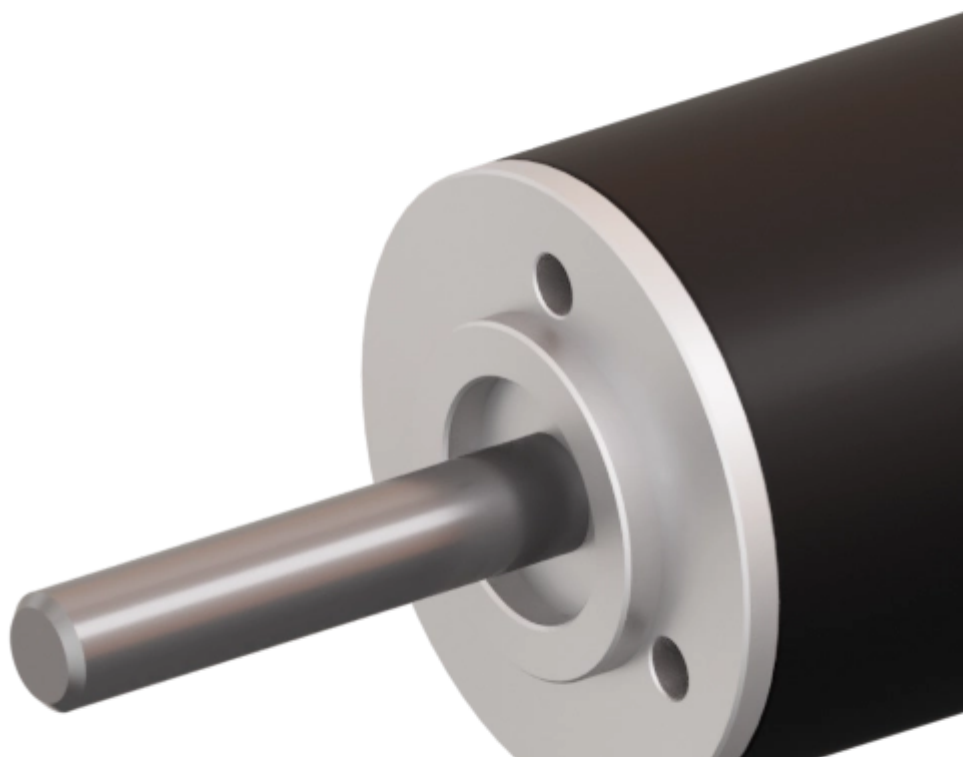

Feature

SVTN A 02-1636-36-S-H

Nominal voltage	36 V
No load speed	40760 rpm
No load current	72 mA
Nominal speed	37406 rpm
Nominal torque	5.000 mNm
Nominal current	0.670 A
Stall torque	60.800 mNm
Stall current	7.300 A
Max. efficiency	81.200 %
Terminal resistance*	4.900 ?
Terminal inductance*	0.240 mH
Torque constant	8.350 mNm/A
Speed constant	1143 mNm/V

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

High-Speed Brushless DC Motors

SVTN A 02-1636-36-S-H

Speed/torque gradient	671.00 rpm/mNm
Mechanical time constant	3.900 ms

SVTN A 02-1636-36-S-H

Rotor inertia

0.550 gcm²

Typically employed in the medical field for surgical tools, these motors merge the SVTN A Series characteristics to an optimized project for high-speed functions. Thanks to a precise balancing of the rotor and the use of special bearings, maximum stability, and low noise are guaranteed.



Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



p e s

product
engineering
services

expertise in connectivity