


variables/V-color

Micromotors | Slotless BLDC motor | SVTN A 02-1656-36-S-H



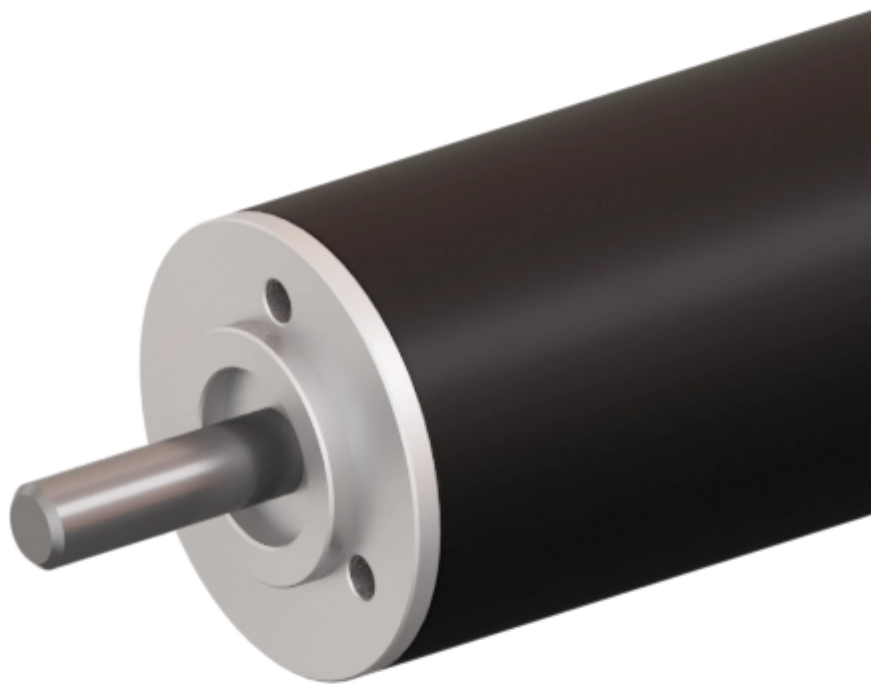

Feature

SVTN A 02-1656-36-S-H

Nominal voltage	36 V
No load speed	41311 rpm
No load current	79 mA
Nominal speed	38898 rpm
Nominal torque	6.000 mNm
Nominal current	0.800 A
Stall torque	103.000 mNm
Stall current	12.500 A
Max. efficiency	84.700 %
Terminal resistance*	2.880 ?
Terminal inductance*	0.200 mH
Torque constant	8.270 mNm/A
Speed constant	1155 mNm/V

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

High-Speed Brushless DC Motors

SVTN A 02-1656-36-S-H

Speed/torque gradient	402.00 rpm/mNm
Mechanical time constant	2.600 ms

SVTN A 02-1656-36-S-H

Rotor inertia

0.610 gcm²

Typically employed in the medical field for surgical tools, these motors merge the SVTN A Series characteristics to an optimized project for high-speed functions. Thanks to a precise balancing of the rotor and the use of special bearings, maximum stability, and low noise are guaranteed.



Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



p e s

product
engineering
services

expertise in connectivity